

# Spotting Scope Instruction Manual


# SIGHTRON

Congratulations on the purchase of your new Sightron Spotting Scope. We have designed your spotting scope for a lifetime of enjoyment and performance. Sightron Spotting Scopes are the finest products on the market and are backed by Sightron's Lifetime Warranty. If you have any questions please feel free to contact us at [Info@sightron.com](mailto:Info@sightron.com) on the web, or by phone at 919-562-3000.

## Your Sightron Spotting Scope

Before using your Spotting Scope we suggest you take a minute to check each accessory and learn it's function. Your Scope includes the following:


- Variable Zoom Eyepiece
- Protective Scope Case
- Ocular and Objective Lens Caps

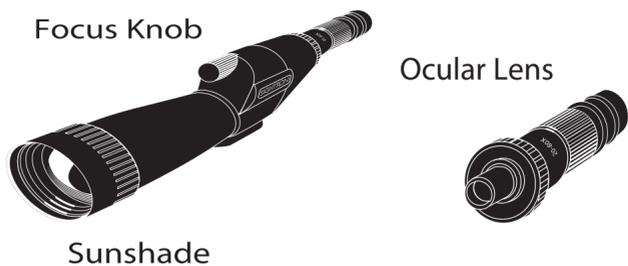

## Removing and Installing Eyepieces

Your Spotting Scope comes with a Variable Zoom eyepiece from the factory. To install the eyepiece simply rotate the eyepiece mounting ring in a clockwise direction until tight. To unistall the eyepiece simply rotate the eyepiece in a counter clockwise direction.


Note: Only hand tighten the mounting ring as only a snug fit is required.

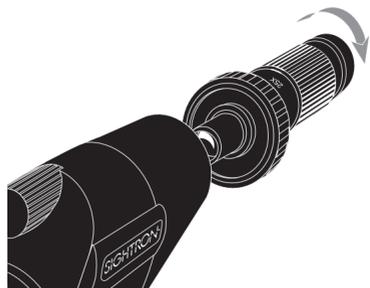

## Changing Magnification


The Zoom Eyepiece is best used when you need to view a distant object closer. As you zoom up in magnification the field of view will become smaller and the object will become larger. To change magnification on the eyepiece rotate clockwise or counter clockwise to the desired magnification.

Note: The eyepiece will not rotate any lower or higher than the specified magnification.

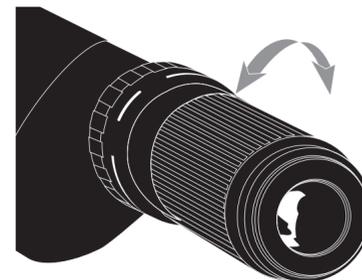

## Focusing Your Spotting Scope


To focus your Spotting Scope, simply rotate the focus knob until the image becomes clear. On models that have coarse and fine focusing adjustments, use the coarse adjustment for longer focal adjustments and the fine adjustment for shorter focal adjustments. Under certain conditions the more magnification you use, the image can become unclear due to atmospheric conditions.

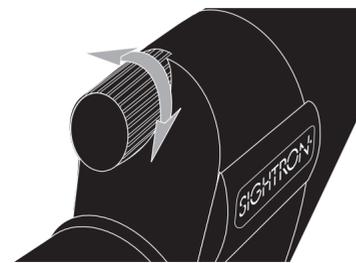

## Mounting Your Spotting Scope

All Sightron Spotting Scopes use the industry standard 1/4 x 20 thread screw hole. To mount your Spotting Scope simply screw the mounting plate using the mounting screw into the bottom of the spotting scope mount plate until snug.

Note: Do not over tighten.

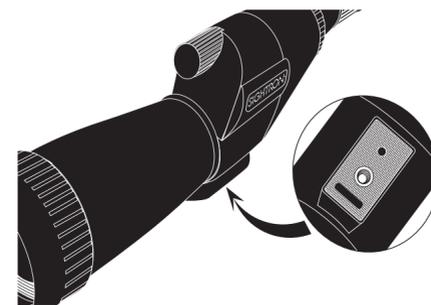

## Maintenance

Keeping your lenses clean is important and dirt or improper cleaning can degrade the image or destroy the coating. A lens cleaning kit is recommended and can be purchased at most retail outlets. Do not use water or window cleaning products to clean lenses as the minerals will remove the lens coatings.

## Sightron, Inc. Lifetime Warranty

Sightron, Inc., will repair this product or replace the product at Sightron's discretion. This warranty only covers failure due to defects in materials or workmanship which occur during normal or regular use. It does not cover damage which occurs in shipment or failures which result from accident, misuse, abuse, neglect, mishandeling, misapplication, alteration, modification or service by anyone other than Sightron, Inc., or damage that is attributable to acts of God.